

Industrial Centrifugal Series Air Curtain INSTALLATION MANUAL




**THANKS FOR PURCHASING THIS AIR CURTAIN
PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE USE**

1. PRODUCT INTRODUCTION

As a new modern decorative & high-level product - Air Curtain, also the air conditioners best partner. Applicable installation in a large cold storage, storage room or factory workshop door, air curtain can keep dust, moth, anti-harmful gases, prevent heating and cooling air loss, and so on.

2. IDENTIFICATION & INSTALLATION DIMENSIONS

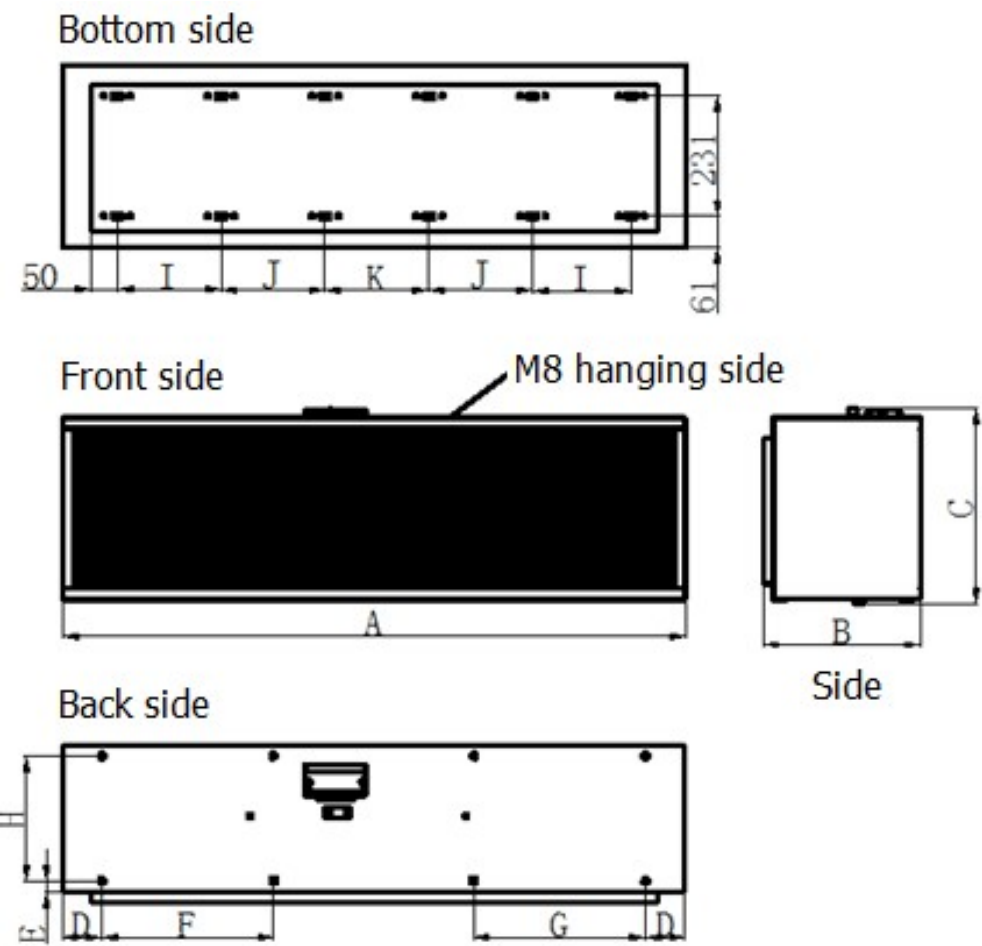

Dimensions Table

型号	A	B	C	D	E	F	G	H	N	I	J	K
FM-6009A	900	306	352	76	22	373	—	240	6	345	—	—
FM-6010A	1000					423	—			395	—	—
FM-6012A	1200					393			8	330	—	330
FM-6015A	1500					450				430	—	430
FM-6018A	1800					550				318	318	318
FM-6020A	2000					620				358	358	358

5、Technical Data

220V～ 50 Hz

Model	Diam Wheel (mm)	Motor poles / speed P/R.P.M	Power (W)	Air Velocity (m/s)	Noise (dB)	Air Volume (m ³ /h)	Weight (Kg)	Size (mm)
FM-6009A	160	2/2100	1300	25	66	3760	32. 5	900×352×306
FM-6010A			1400		66	4150	33. 5	1000×352×306
FM-6012A			2000		69	5640	47	1200×352×306
FM-6015A			2600		70	7520	57. 5	1500×352×306
FM-6018A			2800		70	8500	63	1800×352×306
FM-6020A			3300		72	9400	73. 5	2000×352×306

Coverage door height: 5 – 6 m.